




- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	3VX
Top Width "T"(mm)	10
Height "H" (mm)	8
Belt Weight Kg/m	0,079



Size	Outside Length-Inches (La)
3VX250	25,0
3VX265	26,5
3VX280	28,0
3VX300	30,0
3VX315	31,5
3VX135	13,5
3VX355	35,5
3VX175	17,5
3VX400	40,0
3VX425	42,5
3VX450	45,0
3VX475	47,5
3VX500	50,0
3VX510	51,0
3VX560	56,0
3VX600	60,0
3VX630	63,0
3VX670	67,0
3VX710	71,0
3VX750	75,0
3VX800	80,0
3VX850	85,0
3VX900	90,0
3VX950	95,0
3VX1000	100,0
3VX1060	106,0
3VX1120	112,0
3VX1180	118,0
3VX1250	125,0
3VX1320	132,0
3VX1400	140,0

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	5VX
Top Width "T"(mm)	17
Height "H" (mm)	14
Belt Weight Kg/m	0,181



Size	Outside Length-Inches (La)
5VX500	50,0
5VX560	56,0
5VX600	60,0
5VX630	63,0
5VX670	67,0
5VX710	71,0
5VX750	75,0
5VX800	80,0
5VX850	85,0
5VX900	90,0
5VX950	95,0
5VX1000	100,0
5VX1060	106,0
5VX1120	112,0
5VX1180	118,0
5VX1250	125,0
5VX1320	132,0
5VX1500	150,0
5VX1600	160,0
5VX1700	170,0
5VX1800	180,0
5VX1900	190,0
5VX2000	200,0
5VX2120	212,0
5VX2240	224,0
5VX2360	236,0
5VX2500	250,0
5VX2650	265,0
5VX2800	280,0
5VX3000	300,0
5VX3150	315,0
5VX3350	335,0
5VX3550	355,0

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	CX
Top Width "T"(mm)	22
Height "H" (mm)	14
Belt Weight Kg/m	0.299



Size	PitCXh Length in MM (Lp)	Outside Length in InCXh (La)
CX42	1120	46
CX43	1150	47
CX44	1170	48
CX45	1200	49
CX46	1220	50
CX47	1250	51
CX48	1280	52
CX50	1330	54
CX51	1350	55
CX53	1400	57
CX54	1430	58
CX55	1450	59
CX57	1500	61
CX60	1580	64
CX62	1630	66
CX63	1660	67
CX65	1710	69
CX67	1760	71
CX68	1780	72
CX69	1810	73
CX70	1830	74
CX71	1860	75
CX72	1880	76
CX73	1910	77
CX75	1960	79
CX76	1990	80
CX78	2040	82
CX80	2090	84
CX81	2110	85
CX83	2160	87
CX84	2190	88
CX85	2220	89
CX87	2270	91
CX90	2340	94
CX92	2390	96
CX93	2420	97
CX95	2470	99
CX96	2490	100
CX97	2520	101
CX99	2570	103
CX100	2600	104
CX101	2620	105
CX103	2670	107
CX105	2720	109
CX106	2750	110
CX107	2770	111
CX108	2800	112
CX109	2820	113
CX110	2850	114
CX111	2880	115
CX112	2900	116
CX115	2980	119
CX116	3000	120
CX118	3050	122
CX120	3100	124
CX122	3150	126
CX124	3210	128
CX126	3260	130
CX128	3310	132
CX130	3360	134

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	5V
Top Width "T"(mm)	17
Height "H" (mm)	14
Belt Weight Kg/m	0,181



Size	Outside Length-Inches (La)
5V500	50,0
5V560	56,0
5V600	60,0
5V630	63,0
5V670	67,0
5V710	71,0
5V750	75,0
5V800	80,0
5V850	85,0
5V900	90,0
5V950	95,0
5V1000	100,0
5V1060	106,0
5V1120	112,0
5V1180	118,0
5V1250	125,0
5V1320	132,0
5V1500	150,0
5V1600	160,0
5V1700	170,0
5V1800	180,0
5V1900	190,0
5V2000	200,0
5V2120	212,0
5V2240	224,0
5V2360	236,0
5V2500	250,0
5V2650	265,0
5V2800	280,0
5V3000	300,0
5V3150	315,0
5V3350	335,0
5V3550	355,0

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	8V
Top Width "T"(mm)	25
Height "H" (mm)	23
Belt Weight Kg/m	0,561



Size	Outside Length-Inches (La)
8V1000	100,0
8V1120	112,0
8V1180	118,0
8V1250	125,0
8V1310	131,0
8V1400	140,0
8V1500	150,0
8V1600	160,0
8V1700	170,0
8V1800	180,0
8V1900	190,0
8V2000	200,0
8V2120	212,0
8V2240	224,0
8V2360	236,0
8V2500	250,0
8V2650	265,0
8V2800	280,0
8V3000	300,0
8V3150	315,0
8V3350	335,0
8V3550	355,0
8V3750	375,0
8V4000	400,0
8V4250	425,0
8V4500	450,0
8V4750	475,0
8V5000	500,0
8V5600	560,0
8V5800	580,0

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	AX
Top Width "T"(mm)	13
Height "H" (mm)	8
Belt Weight Kg/m	0,108



Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
AX19	520	21
AX20	540	22
AX21	570	23
AX22	590	24
AX23	620	25
AX24	640	26
AX25	670	27
AX26	690	28
AX27	720	29
AX28	740	30
AX29	770	31
AX30	800	32
AX31	820	33
AX32	850	34
AX33	870	35
AX34	900	36
AX35	920	37
AX36	950	38
AX37	970	39
AX38	1000	40
AX39	1020	41
AX40	1050	42
AX41	1070	43
AX42	1100	44
AX43	1130	45
AX44	1150	46
AX45	1180	47
AX46	1200	48
AX47	1230	49
AX48	1250	50
AX49	1280	51
AX50	1300	52
AX51	1330	53
AX52	1350	54
AX53	1380	55
AX54	1400	56
AX55	1430	57
AX56	1460	58
AX57	1480	59
AX58	1510	60
AX59	1530	61
AX60	1560	62
AX61	1580	63
AX62	1610	64
AX63	1630	65
AX64	1660	66
AX65	1680	67
AX66	1710	68
AX67	1730	69
AX68	1760	70
AX69	1790	71
AX70	1810	72
AX71	1840	73
AX72	1860	74
AX73	1890	75
AX74	1910	76
AX75	1940	77
AX76	1960	78
AX77	1990	79
AX78	2010	80
AX80	2070	82
AX81	2090	83
AX82	2120	84
AX83	2140	85
AX84	2170	86
AX85	2190	87
AX86	2220	88
AX87	2240	89
AX88	2270	90
AX89	2290	91
AX90	2320	92
AX91	2340	93
AX92	2370	94
AX93	2400	95
AX94	2420	96
AX95	2450	97
AX96	2470	98
AX97	2500	99
AX98	2520	100
AX100	2570	102

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	B
Top Width "T"(mm)	17
Height "H" (mm)	11
Belt Weight Kg/m	0,182




Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
B 20	550	23
B 21	580	24
B 22	600	25
B 23	630	26
B 24	650	27
B 25	680	28
B 26	700	29
B 27	730	30
B 28	750	31
B 29	780	32
B 30	810	33
B 31	830	34
B 32	860	35
B 33	880	36
B 34	910	37
B 35	930	38
B 36	960	39
B 37	980	40
B 38	1010	41
B 39	1030	42
B 40	1060	43
B 41	1080	44
B 42	1110	45
B 43	1140	46
B 44	1160	47
B 45	1190	48
B 46	1210	49
B 47	1240	50
B 48	1260	51
B 49	1290	52
B 50	1310	53
B 51	1340	54
B 52	1360	55
B 53	1390	56
B 54	1410	57
B 55	1440	58
B 56	1470	59
B 57	1490	60
B 58	1520	61
B 59	1540	62
B 60	1570	63
B 61	1590	64
B 62	1620	65
B 63	1640	66
B 64	1670	67
B 65	1690	68
B 66	1720	69

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
B 67	1740	70
B 68	1770	71
B 69	1800	72
B 70	1820	73
B 71	1850	74
B 72	1870	75
B 73	1900	76
B 74	1920	77
B 75	1950	78
B 76	1970	79
B 77	2000	80
B 78	2020	81
B 79	2050	82
B 80	2080	83
B 81	2100	84
B 82	2130	85
B 83	2150	86
B 84	2180	87
B 85	2200	88
B 86	2230	89
B 87	2250	90
B 88	2280	91
B 89	2300	92
B 90	2330	93
B 91	2350	94
B 92	2380	95
B 93	2410	96
B 94	2430	97
B 95	2460	98
B 96	2480	99
B 97	2510	100
B 98	2530	101
B 99	2560	102
B 100	2580	103
B 102	2630	105
B 103	2660	106
B 104	2680	107
B 105	2710	108
B 106	2740	109
B 108	2790	111
B 110	2840	113
B 112	2890	115
B 114	2940	117
B 115	2960	118
B 116	2990	119
B 118	3040	121
B 120	3090	123

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
B 121	3110	124
B 122	3140	125
B 124	3190	127
B 126	3240	129
B 128	3290	131
B 130	3350	133
B 133	3420	136
B 136	3500	139
B 138	3550	141
B 140	3600	143
B 142	3650	145
B 144	3700	147
B 146	3750	149
B 148	3800	151
B 150	3850	153
B 152	3900	155
B 154	3950	157
B 158	4060	161
B 162	4160	165
B 166	4260	169
B 173	4440	176
B 180	4620	183
B 188	4820	191
B 190	4870	193
B 195	5000	198
B 205	5250	208
B 210	5380	213
B 225	5760	228
B 240	6140	243
B 255	6520	258
B 270	6900	273
B 285	7280	288
B 300	7660	303
B 315	8040	318

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	BX
Top Width "T" (mm)	17
Height "H" (mm)	11
Belt Weight Kg/m	0,182




Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
B X23	630	26
B X26	700	29
B X27	730	30
B X28	750	31
B X29	780	32
B X30	810	33
B X31	830	34
B X32	860	35
B X33	880	36
B X34	910	37
B X35	930	38
B X36	960	39
B X37	980	40
B X38	1010	41
B X39	1030	42
B X40	1060	43
B X41	1080	44
B X42	1110	45
B X43	1140	46
B X44	1160	47
B X45	1190	48
B X46	1210	49
B X47	1240	50
B X48	1260	51
B X49	1290	52
B X50	1310	53
B X51	1340	54
B X52	1360	55
B X53	1390	56
B X54	1410	57
B X55	1440	58
B X56	1470	59
B X57	1490	60
B X58	1520	61
B X59	1540	62
B X60	1570	63
B X61	1590	64
B X62	1620	65
B X63	1640	66
B X64	1670	67
B X65	1690	68
B X66	1720	69
B X67	1740	70
B X68	1770	71
B X69	1800	72
B X70	1820	73
B X71	1850	74
B X72	1870	75
B X73	1900	76
B X74	1920	77
B X75	1950	78
B X76	1970	79
B X77	2000	80
B X78	2020	81
B X79	2050	82
B X80	2080	83
B X81	2100	84
B X82	2130	85
B X83	2150	86
B X84	2180	87
B X85	2200	88
B X86	2230	89
B X87	2250	90
B X88	2280	91
B X89	2300	92
B X90	2330	93
B X91	2350	94
B X92	2380	95
B X93	2410	96
B X94	2430	97
B X95	2460	98
B X96	2480	99
B X97	2510	100
B X98	2530	101
B X99	2560	102

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
B X100	2580	103
B X102	2630	105
B X103	2660	106
B X104	2680	107
B X105	2710	108
B X106	2740	109
B X108	2790	111
B X110	2840	113
B X112	2890	115
B X114	2940	117
B X115	2960	118
B X116	2990	119
B X118	3040	121
B X120	3090	123
B X122	3140	125
B X124	3190	127
B X130	3350	133
B X140	3600	143

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	C
Top Width "T"(mm)	22
Height "H" (mm)	14
Belt Weight Kg/m	0,299




Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
C36	970	40
C37	1000	41
C38	1020	42
C39	1050	43
C40	1070	44
C41	1100	45
C42	1120	46
C43	1150	47
C44	1170	48
C45	1200	49
C46	1220	50
C47	1250	51
C48	1280	52
C50	1330	54
C51	1350	55
C53	1400	57
C54	1430	58
C55	1450	59
C57	1500	61
C60	1580	64
C62	1630	66
C63	1660	67
C65	1710	69
C67	1760	71
C68	1780	72
C69	1810	73
C70	1830	74
C71	1860	75
C72	1880	76
C73	1910	77
C75	1960	79
C76	1990	80
C78	2040	82
C80	2090	84
C81	2110	85
C83	2160	87
C84	2190	88
C85	2220	89
C87	2270	91
C90	2340	94
C92	2390	96
C93	2420	97
C95	2470	99
C96	2490	100
C97	2520	101
C99	2570	103
C100	2600	104

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
C101	2620	105
C103	2670	107
C105	2720	109
C106	2750	110
C107	2770	111
C108	2800	112
C109	2820	113
C110	2850	114
C111	2880	115
C112	2900	116
C115	2980	119
C116	3000	120
C118	3050	122
C120	3100	124
C122	3150	126
C124	3210	128
C126	3260	130
C128	3310	132
C130	3360	134
C136	3510	140
C140	3610	144
C144	3710	148
C148	3820	152
C150	3870	154
C152	3920	156
C156	4020	160
C158	4070	162
C162	4170	166
C170	4370	174
C173	4450	177
C180	4630	184
C185	4760	189
C190	4880	194
C195	5010	199
C210	5390	214
C225	5770	229
C238	6100	242
C240	6150	244
C255	6530	259
C268	6860	272
C270	6910	274
C285	7300	289
C298	7630	302
C300	7680	304
C315	8060	319
C328	8390	332
C330	8440	334

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
C345	8820	349
C358	9150	362
C360	9200	364
C390	9960	394
C418	10670	422
C420	10720	424

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	D
Top Width "T" (mm)	32
Height "H" (mm)	19
Belt Weight Kg/m	0,608



Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
D75	1990	80
D88	2320	93
D90	2370	95
D95	2500	100
D 105	2750	110
D 112	2930	117
D 120	3 130	125
D 128	3330	133
D 136	3540	141
D 144	3740	149
D 158	4 100	163
D 162	4200	167
D 173	4480	178
D 180	4660	185
D 195	5040	200
D204	5260	209
D210	5420	215
D225	5800	230
D238	6 130	243
D240	6 180	245
D255	6560	260
D268	6890	273
D270	6940	275
D285	7320	290
D298	7650	303
D300	7700	305
D314	8060	319
D315	8080	320
D328	8410	333
D330	8470	335
D345	8850	350
D358	9 180	363
D360	9230	365
D390	9990	395
D418	10700	423
D420	10750	425
D441	11280	446
D450	11510	455
D478	12220	483
D480	12280	485
D538	13750	543
D540	13800	545
D598	15270	603
D600	15320	605

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Cross Section		PH	PJ	PL	PM
Pitch (p)	mm	16	2,34	4,7	9,4
Height (t)	mm	2,9	3,8	7	13,5
Belt Wt Kg/Rib mtr		0,006	0,01	0,037	0,12
Nominal Length (Angle 40 Degree)	mm	1320 - 2540	450 - 2500	1250 - 15000	2300 - 15000
	Inches	50 - 100	18 - 100	49 - 590	90 - 590



PH Section-Max Rib 24

Size	Effect Length-Inches (Le)	Effect Length-MM (Le)
520 H	52,0	1321
530 H	53,0	1346
540 H	54,0	1372
550 H	55,0	1397
560 H	56,0	1422
580 H	58,0	1473
610 H	61,0	1549
625 H	62,5	1588
655 H	65,5	1664
690 H	69,0	1753
730 H	73,0	1854
745 H	74,5	1892
750 H	75,0	1905
760 H	76,0	1930
770 H	77,0	1956
775 H	77,5	1969
780 H	78,0	1981
785 H	78,5	1994
790 H	79,0	2007
800 H	80,0	2032
810 H	81,0	2057
820 H	82,0	2083
830 H	83,0	2108
840 H	84,0	2134
850 H	85,0	2159
860 H	86,0	2184
870 H	87,0	2210
880 H	88,0	2235
890 H	89,0	2261
900 H	90,0	2286
910 H	91,0	2311
920 H	92,0	2337
930 H	93,0	2362
940 H	94,0	2388
950 H	95,0	2413
960 H	96,0	2438
970 H	97,0	2464
980 H	98,0	2489
990 H	99,0	2515
1000 H	100,0	2540

PJ Section-Max Rib 24

Size	Effect Length-Inches (Le)	Effect Length-MM (Le)
190 J	19,0	483
200 J	20,0	508
220 J	22,0	559
230 J	23,0	584
240 J	24,0	610
260 J	26,0	660
280 J	28,0	711
285 J	28,5	724
300 J	30,0	762
320 J	32,0	813
340 J	34,0	864
360 J	36,0	914
370 J	37,0	940
380 J	38,0	965
400 J	40,0	1016
415 J	41,5	1054
430 J	43,0	1092
435 J	43,5	1105
440 J	44,0	1118
445 J	44,5	1130
450 J	45,0	1143
460 J	46,0	1168
470 J	47,0	1194
480 J	48,0	1219
485 J	48,5	1232
490 J	49,0	1245
500 J	50,0	1270
505 J	50,5	1283
510 J	51,0	1295
515 J	51,5	1308
520 J	52,0	1321
530 J	53,0	1346
540 J	54,0	1372
550 J	55,0	1397
560 J	56,0	1422
580 J	58,0	1473
610 J	61,0	1549
625 J	62,5	1588
650 J	65,0	1651
655 J	65,5	1664
690 J	69,0	1753
730 J	73,0	1854
745 J	74,5	1892
750 J	75,0	1905

PJ Section-Max Rib 24

Size	Effect Length-Inches (Le)	Effect Length-MM (Le)
770 J	77,0	1956
775 J	77,5	1969
785 J	78,5	1994
820 J	82,0	2083
870 J	87,0	2210
890 J	89,0	2261
900 J	90,0	2286
920 J	92,0	2337
940 J	94,0	2388
960 J	96,0	2438
980 J	98,0	2489
1000 J	100,0	2540

PL Section-Max Rib 50


Size	Effect Length-Inches (Le)	Effect Length-MM (Le)
500 L	50,0	1270
525 L	52,5	1334
540 L	54,0	1372
550 L	55,0	1397
560 L	56,0	1422
580 L	58,0	1473
615 L	61,5	1562
635 L	63,5	1613
655 L	65,5	1664
675 L	67,5	1715
710 L	71,0	1803
725 L	72,5	1842
765 L	76,5	1943
780 L	78,0	1981
795 L	79,5	2019
815 L	81,5	2070
825 L	82,5	2096
840 L	84,0	2134
865 L	86,5	2197
880 L	88,0	2235
915 L	91,5	2324
930 L	93,0	2362
975 L	97,5	2477
990 L	99,0	2515
1065 L	106,5	2705
1080 L	108,0	2743
1120 L	112,0	2845
1140 L	114,0	2896
1150 L	115,0	2921
1180 L	118,0	2997
1215 L	121,5	3086
1230 L	123,0	3124
1295 L	129,5	3289
1310 L	131,0	3327
1375 L	137,5	3493
1455 L	145,5	3696
1595 L	159,5	4051
1650 L	165,0	4191
1760 L	176,0	4470
1820 L	182,0	4623
1980 L	198,0	5029
2120 L	212,0	5385
2400 L	240,0	6096
2410 L	241,0	6121
2710 L	271,0	6883
3010 L	301,0	7645

PM Section-Max Rib 36

Size	Effect Length-Inches (Le)	Effect Length-MM (Le)
990 M	99,0	2515
1060 M	106,0	2692
1115 M	111,5	2832
1150 M	115,0	2921
1185 M	118,5	3010
1230 M	123,0	3124
1310 M	131,0	3327
1390 M	139,0	3531
1470 M	147,0	3734
1610 M	161,0	4089
1650 M	165,0	4191
1760 M	176,0	4470
1830 M	183,0	4648
1980 M	198,0	5029
2130 M	213,0	5410
2410 M	241,0	6121
2710 M	271,0	6883
3010 M	301,0	7645
3310 M	331,0	8407
3610 M	361,0	9169

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	SPA
Top Width "T" (mm)	13
Height "H" (mm)	10
Belt Weight Kg/m	0,125




Size	Pitch Length in MM (Lp)
SPA630	630
SPA670	670
SPA730	730
SPA732	732
SPA750	750
SPA760	760
SPA762	762
SPA772	772
SPA782	782
SPA800	800
SPA820	820
SPA832	832
SPA850	850
SPA900	900
SPA910	910
SPA922	922
SPA932	932
SPA950	950
SPA967	967
SPA982	982
SPA1000	1000
SPA1032	1032
SPA1060	1060
SPA1082	1082
SPA1107	1107
SPA1120	1120
SPA1132	1132
SPA1150	1150
SPA1157	1157
SPA1180	1180
SPA1207	1207
SPA1232	1232
SPA1250	1250
SPA1257	1257
SPA1272	1272
SPA1282	1282
SPA1300	1300
SPA1307	1307
SPA1320	1320
SPA1332	1332
SPA1340	1340
SPA1357	1357
SPA1360	1360
SPA1375	1375
SPA1382	1382
SPA1400	1400
SPA1407	1407

Size	Pitch Length in MM (Lp)
SPA1425	1425
SPA1430	1430
SPA1432	1432
SPA1450	1450
SPA1457	1457
SPA1482	1482
SPA1500	1500
SPA1507	1507
SPA1525	1525
SPA1532	1532
SPA1550	1550
SPA1557	1557
SPA1582	1582
SPA1600	1600
SPA1607	1607
SPA1630	1630
SPA1632	1632
SPA1650	1650
SPA1657	1657
SPA1662	1662
SPA1675	1675
SPA1680	1680
SPA1682	1682
SPA1700	1700
SPA1707	1707
SPA1732	1732
SPA1750	1750
SPA1757	1757
SPA1782	1782
SPA1800	1800
SPA1807	1807
SPA1832	1832
SPA1850	1850
SPA1857	1857
SPA1882	1882
SPA1900	1900
SPA1907	1907
SPA1932	1932
SPA1950	1950
SPA1982	1982
SPA2000	2000
SPA2032	2032
SPA2057	2057
SPA2082	2082
SPA2120	2120
SPA2132	2132
SPA2182	2182

Size	Pitch Length in MM (Lp)
SPA2207	2207
SPA2227	2227
SPA2232	2232
SPA2240	2240
SPA2282	2282
SPA2300	2300
SPA2307	2307
SPA2332	2332
SPA2360	2360
SPA2382	2382
SPA2432	2432
SPA2482	2482
SPA2500	2500
SPA2532	2532
SPA2582	2582
SPA2607	2607
SPA2650	2650
SPA2682	2682
SPA2732	2732
SPA2782	2782
SPA2800	2800
SPA2832	2832
SPA2882	2882
SPA2982	2982
SPA3000	3000
SPA3070	3070
SPA3082	3082
SPA3150	3150
SPA3182	3182
SPA3282	3282
SPA3350	3350
SPA3482	3482
SPA3550	3550
SPA3750	3750
SPA4000	4000
SPA4250	4250
SPA4500	4500

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	SPB
Top Width "T"(mm)	17
Height "H" (mm)	13
Belt Weight Kg/m	0,181




Size	Pitch Length in MM (Lp)
SPB 1250	1250
SPB 1260	1260
SPB 1320	1320
SPB 1340	1340
SPB 1400	1400
SPB 1410	1410
SPB 1450	1450
SPB 1500	1500
SPB 1510	1510
SPB 1590	1590
SPB 1600	1600
SPB 1627	1627
SPB 1690	1690
SPB 1700	1700
SPB 1800	1800
SPB 1900	1900
SPB 2000	2000
SPB 2020	2020
SPB 2098	2098
SPB 2120	2120
SPB 2150	2150
SPB 2180	2180
SPB 2240	2240
SPB 2280	2280
SPB 2300	2300
SPB 2360	2360
SPB 2361	2361
SPB 2410	2410
SPB 2500	2500
SPB 2530	2530
SPB 2650	2650
SPB 2680	2680
SPB 2800	2800
SPB 1990	1990
SPB 3000	3000
SPB 3150	3150
SPB 3350	3350
SPB 3550	3550
SPB 3750	3750
SPB 3800	3800
SPB 4000	4000
SPB 4150	4150
SPB 4500	4500
SPB 4750	4750
SPB 5000	5000
SPB 5300	5300
SPB 5600	5600

Size	Pitch Length in MM (Lp)
SPB 6000	6000
SPB 6700	6700
SPB 7100	7100
SPB 7500	7500
SPB 8000	8000

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	SPC
Top Width "T"(mm)	22
Height "H" (mm)	18
Belt Weight Kg/m	0,348



Size	Pitch Length in MM (Lp)
SPC 1800	1800
SPC 2000	2000
SPC 2120	2120
SPC 2240	2240
SPC 2360	2360
SPC 2500	2500
SPC 2650	2650
SPC 2800	2800
SPC 3000	3000
SPC 3150	3150
SPC 3350	3350
SPC 3550	3550
SPC 3750	3750
SPC 4000	4000
SPC 4250	4250
SPC 4500	4500
SPC 4750	4750
SPC 5000	5000
SPC 5300	5300
SPC 5600	5600
SPC 6000	6000
SPC 6300	6300
SPC 6700	6700
SPC 7100	7100
SPC 7500	7500
SPC 8000	8000
SPC 8500	8500
SPC 9000	9000
SPC 10000	10000
SPC 10600	10600
SPC 11300	11300
SPC 11600	11600
SPC 12500	12500

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	SPZ
Top Width "T"(mm)	10
Height "H" (mm)	8
Belt Weight Kg/m	0,079




Size	Pitch Length in M M (Lp)
SPZ604	604
SPZ612	612
SPZ630	630
SPZ637	637
SPZ640	640
SPZ660	660
SPZ672	672
SPZ680	680
SPZ682	682
SPZ710	710
SPZ722	722
SPZ730	730
SPZ737	737
SPZ750	750
SPZ758	758
SPZ762	762
SPZ787	787
SPZ800	800
SPZ812	812
SPZ825	825
SPZ837	837
SPZ850	850
SPZ862	862
SPZ875	875
SPZ887	887
SPZ900	900
SPZ912	912
SPZ925	925
SPZ937	937
SPZ950	950
SPZ962	962
SPZ987	987
SPZ1000	1000
SPZ1010	1010
SPZ1012	1012
SPZ1024	1024
SPZ1037	1037
SPZ1047	1047
SPZ1060	1060
SPZ1077	1077
SPZ1080	1080
SPZ1087	1087
SPZ1112	1112
SPZ1120	1120
SPZ1137	1137
SPZ1140	1140
SPZ1150	1150

Size	Pitch Length in M M (Lp)
SPZ1162	1162
SPZ1150	1150
SPZ1187	1187
SPZ1202	1202
SPZ1210	1210
SPZ1212	1212
SPZ1227	1227
SPZ1237	1237
SPZ1250	1250
SPZ1262	1262
SPZ1270	1270
SPZ1287	1287
SPZ1312	1312
SPZ1320	1320
SPZ1337	1337
SPZ1340	1340
SPZ1362	1362
SPZ1387	1387
SPZ1400	1400
SPZ1412	1412
SPZ1420	1420
SPZ1430	1430
SPZ1437	1437
SPZ1450	1450
SPZ1462	1462
SPZ1470	1470
SPZ1487	1487
SPZ1500	1500
SPZ1512	1512
SPZ1520	1520
SPZ1527	1527
SPZ1537	1537
SPZ1560	1560
SPZ1562	1562
SPZ1587	1587
SPZ1600	1600
SPZ1612	1612
SPZ1637	1637
SPZ1650	1650
SPZ1662	1662
SPZ1687	1687
SPZ1700	1700
SPZ1712	1712
SPZ1737	1737
SPZ1750	1750
SPZ1762	1762
SPZ1787	1787

Size	Pitch Length in M M (Lp)
SPZ1800	1800
SPZ1812	1812
SPZ1837	1837
SPZ1850	1850
SPZ1862	1862
SPZ1887	1887
SPZ1900	1900
SPZ1937	1937
SPZ1950	1950
SPZ1962	1962
SPZ1987	1987
SPZ2000	2000
SPZ2030	2030
SPZ2037	2037
SPZ2062	2062
SPZ2087	2087
SPZ2120	2120
SPZ2137	2137
SPZ2187	2187
SPZ2240	2240
SPZ2280	2280
SPZ2287	2287
SPZ2300	2300
SPZ2360	2360
SPZ2410	2410
SPZ2437	2437
SPZ2487	2487
SPZ2500	2500
SPZ2540	2540
SPZ2650	2650
SPZ2800	2800
SPZ2840	2840
SPZ3000	3000
SPZ3150	3150
SPZ3350	3350
SPZ3550	3550

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Cross Section	XL	L	H	XH
Pitch (p) mm	5.08 - 1/5"	9.525 - 3/8"	12.7 - 1/2"	22.225 - 7/8"
Height (t) mm	2,30	3,60	4,30	1120

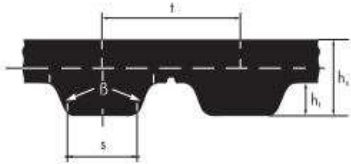

Section XL

Length Code	Pitch Length-Inches	No. of Teeth
60XL	6.0	30
70XL	7.0	35
76XL	7.6	38
80XL	8.0	40
90XL	9.0	45
96XL	9.6	48
100XL	10.0	50
102XL	10.2	51
106XL	10.6	53
108XL	10.8	54
110XL	11.0	55
112XL	11.2	56
114XL	11.4	57
116XL	11.6	58
118XL	11.8	59
120XL	12.0	60
124XL	12.4	62
126XL	12.6	63
130XL	13.0	65
132XL	13.2	66
136XL	13.6	68
140XL	14.0	70
146XL	14.6	73
150XL	15.0	75
154XL	15.4	77
160XL	16.0	80
166XL	16.6	83
170XL	17.0	85
172XL	17.2	86
176XL	17.6	88
180XL	18.0	90
182XL	18.2	91
184XL	18.4	92
188XL	18.8	94
190XL	19.0	95
196XL	19.6	98
198XL	19.8	99
200XL	20.0	100
212XL	21.2	106
220XL	22.0	110
234XL	23.4	117
240XL	24.0	120
248XL	24.8	124
250XL	25.0	125
260XL	26.0	130
270XL	27.0	135
276XL	27.6	138
280XL	28.0	140
286XL	28.6	143
290XL	29.0	145
300XL	30.0	150
316XL	31.6	158
320XL	32.0	160
330XL	33.0	165
340XL	34.0	170
344XL	34.4	172
352XL	35.2	176
380XL	38.0	190
384XL	38.4	192
390XL	39.0	195
400XL	40.0	200
412XL	41.2	206
414XL	41.4	207
432XL	43.2	216
450XL	45.0	225
460XL	46.0	230
490XL	49.0	245
564XL	56.4	282
574XL	57.4	287
580XL	58.0	290
612XL	61.2	306
630XL	63.0	316

Section L

Length Code	Pitch Length-Inches	No. of Teeth
124L	12.4	33
130L	13.0	35
135L	13.5	36
143L	14.3	38
150L	15.0	40
177L	17.7	47
180L	18.0	48
185L	18.5	49
210L	21.0	56
240L	24.0	64
244L	24.4	65
255L	25.5	68
263L	26.3	70
265L	26.5	71
270L	27.0	72
275L	27.5	73
285L	28.5	76
300L	30.0	80
320L	32.0	85
330L	33.0	88
334L	33.4	89
345L	34.5	92
360L	36.0	96
375L	37.5	100
382L	38.2	102
405L	40.5	108
420L	42.0	112
450L	45.0	120
453L	45.3	121
465L	46.5	124
480L	48.0	128
495L	49.5	132
510L	51.0	136
525L	52.5	140
540L	54.0	144
585L	58.5	156
600L	60.0	160
619L	61.9	165
630L	63.0	168
634L	63.4	169
660L	66.0	176

Section H


Length Code	Pitch Length-Inches	No. of Teeth
240H	24.0	48
250H	25.0	50
260H	26.0	52
270H	27.0	54
280H	28.0	56
285H	28.5	57
290H	29.0	58
300H	30.0	60
330H	33.0	66
350H	35.0	70
355H	35.5	71
360H	36.0	72
365H	36.5	73
375H	37.5	75
380H	38.0	76
390H	39.0	78
395H	39.5	79
400H	40.0	80
440H	44.0	88
445H	44.5	89
450H	45.0	90
460H	46.0	92
480H	48.0	96
485H	48.5	97
490H	49.0	98
500H	50.0	100
550H	55.0	110
560H	56.0	112
565H	56.5	113
570H	57.0	114
580H	58.0	116
585H	58.5	117
590H	59.0	118
600H	60.0	120
650H	65.0	130
660H	66.0	132
670H	67.0	134
680H	68.0	136
700H	70.0	140
750H	75.0	150
770H	77.0	154
780H	78.0	156
800H	80.0	160
850H	85.0	170
900H	90.0	180
985H	98.5	197
1000H	100.0	200
1020H	102.0	204
1050H	105.0	210
1120H	112.0	224
1130H	113.0	226
1200H	120.0	240
1250H	125.0	250
1400H	140.0	280
1440H	144.0	288
1450H	145.0	290
1510H	151.0	302
1660H	166.0	332
1700H	170.0	340
1855H	185.5	371

Section XH

Length Code	Pitch Length-Inches	No. of Teeth
508XH	50.8	58
560XH	56.0	64
630XH	63.0	72
700XH	70.0	80
770XH	77.0	88
800XH	80.0	91
805XH	80.5	92
840XH	84.0	96
850XH	85.0	97
980XH	98.0	112
1000XH	100.0	114
1120XH	112.0	128
1260XH	126.0	144
1400XH	140.0	160
1540XH	154.0	176
1575XH	157.0	180
1750XH	175.0	200

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	XPA
Top Width "T"(mm)	13
Height "H" (mm)	10
Belt Weight Kg/m	0,125




Xize	Pitch Length in MM (Lp)
XPA 1432	1432
XPA 1450	1450
XPA 1457	1457
XPA 1482	1482
XPA 1500	1500
XPA 1507	1507
XPA 1532	1532
XPA 1550	1550
XPA 1557	1557
XPA 1582	1582
XPA 1600	1600
XPA 1607	1607
XPA 1632	1632
XPA 1650	1650
XPA 1682	1682
XPA 1700	1700
XPA 1732	1732
XPA 1750	1750
XPA 1757	1757
XPA 1782	1782
XPA 1800	1800
XPA 1850	1850
XPA 1857	1857
XPA 1882	1882
XPA 1900	1900
XPA 1932	1932
XPA 1950	1950

Xize	Pitch Length in MM (Lp)
XPA 2000	2000
XPA 2032	2032
XPA 2057	2057
XPA 2082	2082
XPA 2120	2120
XPA 2132	2132
XPA 2182	2182
XPA 2207	2207
XPA 2240	2240
XPA 2282	2282
XPA 2300	2300
XPA 2360	2360
XPA 2432	2432
XPA 2482	2482
XPA 2500	2500
XPA 2532	2532
XPA 2582	2582
XPA 2650	2650
XPA 2682	2682
XPA 2732	2732
XPA 2782	2782
XPA 2800	2800

Xize	Pitch Length in MM (Lp)
XPA 3000	3000
XPA 3150	3150
XPA 3350	3350
XPA 3550	3550
XPA 3750	3750

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	XPB
Top Width "T"(mm)	17
Height "H" (mm)	13
Belt Weight Kg/m	0,181




Xize	Pitch Length in MM (Lp)
XPB 1250	1250
XPB 1320	1320
XPB 1340	1340
XPB 1400	1400
XPB 1450	1450
XPB 1500	1500
XPB 1600	1600
XPB 1700	1700
XPB 1800	1800
XPB 1900	1900
XPB 2000	2000
XPB 2020	2020
XPB 2120	2120
XPB 2150	2150
XPB 2180	2180
XPB 2240	2240
XPB 2280	2280
XPB 2300	2300
XPB 2360	2360
XPB 2410	2410
XPB 2500	2500
XPB 2530	2530
XPB 2650	2650
XPB 2680	2680
XPB 2800	2800

Xize	Pitch Length in MM (Lp)
XPB 3000	3000
XPB 3150	3150
XPB 3350	3350
XPB 3550	3550
XPB 3750	3750
XPB 3800	3800
XPB 4000	4000
XPB 4500	4500
XPB 4750	4750
XPB 5000	5000

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	XPC
Top Width "T"(mm)	22
Height "H" (mm)	18
Belt Weight Kg/m	0,348



Xize	Pitch Length in MM (Lp)
XPC2000	2000
XPC2120	2120
XPC2240	2240
XPC2360	2360
XPC2500	2500
XPC2650	2650
XPC2800	2800
XPC3000	3000
XPC3150	3150
XPC3350	3350
XPC3550	3550
XPC3750	3750
XPC4000	4000
XPC4250	4250
XPC4500	4500
XPC4750	4750
XPC5000	5000

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	XPZ
Top Width "T"(mm)	10
Height "H" (mm)	8
Belt Weight Kg/m	0,079




Xize	Pitch Length in MM (Lp)
XPZ612	612
XPZ630	630
XPZ637	637
XPZ710	710
XPZ722	722
XPZ730	730
XPZ737	737
XPZ750	750
XPZ762	762
XPZ787	787
XPZ800	800
XPZ812	812
XPZ825	825
XPZ837	837
XPZ850	850
XPZ862	862
XPZ875	875
XPZ887	887
XPZ900	900
XPZ912	912
XPZ925	925
XPZ937	937
XPZ950	950
XPZ962	962
XPZ987	987
XPZ1000	1000
XPZ1012	1012
XPZ1000	1000
XPZ1012	1012
XPZ1000	1000
XPZ1012	1012
XPZ1050	1050
XPZ1062	1062
XPZ1000	1000
XPZ2240	2240
XPZ2500	2500
XPZ2540	2540
XPZ2650	2650
XPZ2800	2800
XPZ2840	2840
XPZ3000	3000

Xize	Pitch Length in MM (Lp)
XPZ1037	1037
XPZ1047	1047
XPZ1060	1060
XPZ1077	1077
XPZ1080	1080
XPZ1087	1087
XPZ1112	1112
XPZ1120	1120
XPZ1137	1137
XPZ1150	1150
XPZ1162	1162
XPZ1150	1150
XPZ1187	1187
XPZ1202	1202
XPZ1212	1212
XPZ1237	1237
XPZ1250	1250
XPZ1262	1262
XPZ1287	1287
XPZ1312	1312
XPZ1320	1320
XPZ1337	1337
XPZ1700	1700
XPZ1950	1950
XPZ2000	2000
XPZ2037	2037
XPZ2120	2120
XPZ2287	2287
XPZ3350	3350
XPZ3550	3550

Xize	Pitch Length in MM (Lp)
XPZ1362	1362
XPZ1387	1387
XPZ1400	1400
XPZ1412	1412
XPZ1420	1420
XPZ1437	1437
XPZ1462	1462
XPZ1487	1487
XPZ1500	1500
XPZ1512	1512
XPZ1520	1520
XPZ1537	1537
XPZ1562	1562
XPZ1587	1587
XPZ1600	1600
XPZ1612	1612
XPZ1637	1637
XPZ1650	1650
XPZ1662	1662
XPZ1737	1737
XPZ1750	1750
XPZ1762	1762
XPZ2360	2360
XPZ2410	2410

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	Z
Top Width "T"(mm)	10
Height "H" (mm)	6
Belt Weight Kg/m	0,059




Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
Z18	480	19,5
Z19	510	20,5
Z20	530	21,5
Z21	560	22,5
Z22	580	23,5
Z23	610	24,5
Z24	640	25,5
Z25	660	26,5
Z26	690	27,5
Z27	710	28,5
Z28	740	29,5
Z29	760	30,5
Z30	790	31,5
Z31	810	32,5
Z32	840	33,5
Z33	860	34,5
Z34	890	35,5
Z35	910	36,5
Z36	940	37,5
Z37	970	38,5
Z38	990	39,5
Z39	1020	40,5
Z40	1040	41,5
Z41	1070	42,5
Z42	1090	43,5
Z43	1120	44,5
Z44	1140	45,5
Z45	1170	46,5
Z46	1190	47,5
Z47	1220	48,5
Z48	1240	49,5
Z49	1270	50,5
Z50	1300	51,5
Z51	1320	52,5
Z52	1350	53,5
Z53	1370	54,5
Z54	1400	55,5
Z55	1420	56,5
Z56	1450	57,5
Z57	1470	58,5
Z58	1500	59,5
Z59	1520	60,5
Z60	1550	61,5
Z61	1570	62,5
Z62	1600	63,5
Z63	1630	64,5
Z64	1650	65,5

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
Z65	1680	66,5
Z66	1700	67,5
Z67	1730	68,5
Z68	1750	69,5
Z69	1780	70,5
Z70	1800	71,5
Z71	1830	72,5
Z72	1850	73,5
Z73	1880	74,5
Z74	1910	75,5
Z75	1930	76,5
Z76	1960	77,5
Z77	1980	78,5
Z78	2010	79,5
Z79	2030	80,5
Z80	2060	81,5
Z81	2080	82,5
Z82	2110	83,5
Z83	2130	84,5
Z84	2160	85,5
Z85	2180	86,5

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	ZX
Top Width "T"(mm)	10
Height "H" (mm)	6
Belt Weight Kg/m	0,059



SiZXe	Pitch Length in M M (Lp)	Outside Length in Inch (La)
ZX26	690	27,5
ZX27	710	28,5
ZX36	940	37,5
ZX23	610	24,5

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Cross Section	3M	5M	8M	14M
Pitch (p) mm	3mm	5mm	8mm	14mm
Height (t)	2,40	3,80	6,00	10,00



Section 3M		
Length Code	Pitch Length-Inches	No. of Teeth
102-3M	102	34
111-3M	111	37
117-3M	117	39
120-3M	120	40
141-3M	141	47
150-3M	150	50
159-3M	159	53
168-3M	168	56
177-3M	177	59
180-3M	180	60
186-3M	186	62
192-3M	192	64
204-3M	204	68
207-3M	207	69
210-3M	210	70
213-3M	213	71
222-3M	222	74
225-3M	225	75
228-3M	228	76
234-3M	234	78
237-3M	237	79
240-3M	240	80
246-3M	246	82
270-3M	270	90
276-3M	276	92
282-3M	282	94
285-3M	285	95
306-3M	306	102
309-3M	309	103
312-3M	312	104
318-3M	318	106
324-3M	324	108
345-3M	345	116
348-3M	348	118
357-3M	357	119
360-3M	360	120
363-3M	363	121
366-3M	366	122
375-3M	375	125
384-3M	384	128
390-3M	390	130
423-3M	423	141
426-3M	426	142
447-3M	447	149
459-3M	459	153
471-3M	471	157
474-3M	474	158
477-3M	477	159
492-3M	492	164
495-3M	495	165
501-3M	501	167
510-3M	510	170
513-3M	513	171
564-3M	564	188
570-3M	570	190
576-3M	576	192
579-3M	579	193
582-3M	582	194
582-3M	582	194
597-3M	597	199
633-3M	633	211
639-3M	639	213
648-3M	648	216
654-3M	654	218
654-3M	654	218
669-3M	669	223
675-3M	675	225
684-3M	684	228
699-3M	699	233
720-3M	720	240
750-3M	750	250
753-3M	753	251
801-3M	801	267
804-3M	804	268


Section 5M		
Length Code	Pitch Length-Inches	No. of Teeth
200-5M	200	40
225-5M	225	45
280-5M	280	56
285-5M	285	57
295-5M	295	59
300-5M	300	60
305-5M	305	61
310-5M	310	62
320-5M	320	64
325-5M	325	65
330-5M	330	66
365-5M	365	73
370-5M	370	74
375-5M	375	75
385-5M	385	77
395-5M	395	79
400-5M	400	80
440-5M	440	88
445-5M	445	89
450-5M	450	90
460-5M	460	92
470-5M	470	94
505-5M	505	101
520-5M	520	104
525-5M	525	105
560-5M	560	112
565-5M	565	113
570-5M	570	114
575-5M	575	115
615-5M	615	123
620-5M	620	124
625-5M	625	125
630-5M	630	126
635-5M	635	127
640-5M	640	128
645-5M	645	129
650-5M	650	130
695-5M	695	139
700-5M	700	140
710-5M	710	142
715-5M	715	143
725-5M	725	145
740-5M	740	148
790-5M	790	158
800-5M	800	160
810-5M	810	162
825-5M	825	165
830-5M	830	166
835-5M	835	167
850-5M	850	170
860-5M	860	172
870-5M	870	174
960-5M	960	192
975-5M	975	195
980-5M	980	196
1000-5M	1000	200
1025-5M	1025	205
1050-5M	1050	210
1100-5M	1100	220
1225-5M	1225	245
1270-5M	1270	254
1290-5M	1290	258
1350-5M	1350	270
1375-5M	1375	275
1400-5M	1400	280
1420-5M	1420	284
1455-5M	1455	291
1500-5M	1500	300
1945-5M	1945	389
2000-5M	2000	400
2050-5M	2050	410
2160-5M	2160	432
2250-5M	2250	450
2370-5M	2370	474
2460-5M	2460	492
2525-5M	2525	505

Section 8M		
Length Code	Pitch Length-Inches	No. of Teeth
288-8M	288	36
384-8M	384	48
400-8M	400	50
408-8M	408	51
416-8M	416	52
512-8M	512	64
520-8M	520	65
536-8M	536	67
560-8M	560	70
568-8M	568	71
640-8M	640	80
656-8M	656	82
680-8M	680	85
688-8M	688	86
696-8M	696	87
712-8M	712	89
720-8M	720	90
728-8M	728	91
760-8M	760	95
776-8M	776	97
800-8M	800	100
816-8M	816	102
824-8M	824	103
840-8M	840	105
856-8M	856	107
864-8M	864	108
872-8M	872	109
880-8M	880	110
896-8M	896	112
920-8M	920	115
928-8M	928	116
944-8M	944	118
952-8M	952	119
1000-8M	1000	125
1016-8M	1016	127
1040-8M	1040	130
1056-8M	1056	132
1080-8M	1080	135
1100-8M	1104	138
1120-8M	1120	140
1128-8M	1128	141
1200-8M	1200	150
1216-8M	1216	152
1248-8M	1248	156
1256-8M	1256	157
1264-8M	1264	158
1272-8M	1272	159
1280-8M	1280	160
1304-8M	1304	163
1360-8M	1360	170
1392-8M	1392	174
1400-8M	1400	175
1424-8M	1424	178
1440-8M	1440	180
1456-8M	1456	182
1480-8M	1480	188
1576-8M	1576	197
1600-8M	1600	200
1648-8M	1648	206
1680-8M	1680	210
1696-8M	1696	212
1728-8M	1728	216
1760-8M	1760	220
1800-8M	1800	225
1904-8M	1904	238
1936-8M	1936	242
2000-8M	2000	250
2080-8M	2080	260
2096-8M	2096	262
2104-8M	2104	263
2136-8M	2136	267
2208-8M	2208	276
2240-8M	2240	280
2304-8M	2304	288
2400-8M	2400	300
2504-8M	2504	318
2600-8M	2600	325
2736-8M	2736	342
2800-8M	2800	350
3200-8M	3200	400

Section 14M		
Length Code	Pitch Length-Inches	No. of Teeth
966-14M	966	69
1120-14M	1120	80
1190-14M	1190	85
1246-14M	1246	89
1260-14M	1260	90
1288-14M	1288	92
1400-14M	1400	100
1470-14M	1470	105
1510-14M	1510	115
1652-14M	1652	118
1750-14M	1750	125
1764-14M	1764	126
1820-14M	1820	130
1890-14M	1890	135
1960-14M	1960	140
2002-14M	2002	143
2100-14M	2100	150
2590-14M	2590	185
2800-14M	2800	200
3108-14M	3108	222
3150-14M	3150	225
3500-14M	3500	250
3850-14M	3850	275
4760-14M	4760	340

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value


Section of Belt	3V
Top Width "T"(mm)	10
Height "H" (mm)	8
Belt Weight Kg/m	0,079



Size	Outside Length-Inches (La)
3V250	25,0
3V265	26,5
3V280	28,0
3V300	30,0
3V315	31,5
3V135	13,5
3V355	35,5
3V175	17,5
3V400	40,0
3V425	42,5
3V450	45,0
3V475	47,5
3V500	50,0
3V510	51,0
3V560	56,0
3V600	60,0
3V630	63,0
3V670	67,0
3V710	71,0
3V750	75,0
3V800	80,0
3V850	85,0
3V900	90,0
3V950	95,0
3V1000	100,0
3V1060	106,0
3V1120	112,0
3V1180	118,0
3V1250	125,0
3V1320	132,0
3V1400	140,0

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	A
Top Width "T" (mm)	13
Height "H" (mm)	8
Belt Weight Kg/m	0,108




Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
A 18	490	20
A 19	520	21
A 20	540	22
A 21	570	23
A 22	590	24
A 23	620	25
A 24	640	26
A 25	670	27
A 26	690	28
A 27	720	29
A 28	740	30
A 29	770	31
A 30	800	32
A 31	820	33
A 32	850	34
A 33	870	35
A 34	900	36
A 35	920	37
A 36	950	38
A 37	970	39
A 38	1000	40
A 39	1020	41
A 40	1050	42
A 41	1070	43
A 42	1100	44
A 43	1130	45
A 44	1150	46
A 45	1180	47
A 46	1200	48
A 47	1230	49
A 48	1250	50
A 49	1280	51
A 50	1300	52
A 51	1330	53
A 52	1350	54
A 53	1380	55
A 54	1400	56
A 55	1430	57
A 56	1460	58
A 57	1480	59
A 58	1510	60
A 59	1530	61
A 60	1560	62
A 61	1580	63
A 62	1610	64
A 63	1630	65
A 64	1660	66

Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
A 65	1680	67
A 66	1710	68
A 67	1730	69
A 68	1760	70
A 69	1790	71
A 70	1810	72
A 71	1840	73
A 72	1860	74
A 73	1890	75
A 74	1910	76
A 75	1940	77
A 76	1960	78
A 77	1990	79
A 78	2010	80
A 79	2040	81
A 80	2070	82
A 81	2090	83
A 82	2120	84
A 83	2140	85
A 84	2170	86
A 85	2190	87
A 86	2220	88
A 87	2240	89
A 88	2270	90
A 89	2290	91
A 90	2320	92
A 91	2340	93
A 92	2370	94
A 93	2400	95
A 94	2420	96
A 95	2450	97
A 96	2470	98
A 97	2500	99
A 98	2520	100
A 100	2570	102
A 103	2650	105
A 105	2700	107
A 110	2830	112
A 112	2880	114
A 115	2950	117
A 116	2980	118
A 118	3030	120
A 120	3080	122
A 124	3180	126
A 125	3210	127
A 128	3280	130

- * All MAXBELT belts are heat and oil resistant, antistatic; Manufactured by Maxbelt.
- * All MAXBELT belts are pre-heat & stabilised hence does not require matching set
- * Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1 B, JIS K 6323
- * Sizes not mentioned in this catalogue can be supplied on request, Maxbelt weight mentioned is approx. value

Section of Belt	E
Top Width "T" (mm)	38
Height "H" (mm)	23
Belt Weight Kg/m	0,907



Size	Pitch Length in MM (Lp)	Outside Length in Inch (La)
E180	4670	186
E195	5050	201
E210	5430	216
E238	6140	244
E240	6190	246
E268	6900	274
E270	6950	276
E298	7660	304
E300	7720	306
E328	8430	334
E330	8480	336
E358	9190	364
E360	9240	366
E390	10000	396
E394	10100	400
E418	10710	424
E420	10760	426
E441	11300	447
E478	12240	484
E480	12290	486
E538	13760	544
E540	13810	546
E550	14065	556
E598	15280	604

ROYSE SEVILLA

Parque Sevilla Industrial
Calle Parsi 7, nº5
41016-Sevilla
Telf: +34 954 671 050
+ 34 954 999 454
sevilla@rodamientos.net

ROYSE MADRID

Pol. Ind. La Postura
Avda. de la Innovación, 5
Ctra. N-IV-Km 24,5
28340-Valdemoro (Madrid)
Telf: +34 918 084 970
madrid@rodamientos.net

ROYSE GRANADA

Pol. Ind. Juncaril
C/Almuñécar, parcela 163
18220-Albolote (Granada)
Telf: +34 958 467 690
granada@rodamientos.net

ROYSE LINARES

Pol. Ind. Los Jarales
C/Mina la Mejor
23700-Linares (Jaén)
Telf: +34 953 693 400
linares@rodamientos.net

ROYSE CÓRDOBA

Pol. Ind. Las Quemadas
C/Andrés Barrera, s/n
Parcela 110A, mod. 4
14014-Córdoba
Telf: +34 957 322 009
cordoba@rodamientos.net

ROYSE ESTEPA

Pol. Ind. Sierra Sur
Avda. de la Innovación, 5
41560-Esteba (Sevilla)
Telf: +34 955 913 975
esteba@rodamientos.net

ROYSE VALENCIA

Parque Empresarial Táctica
C/Carboners, 12 naves 7 y 8
46988-Paterna (Valencia)
Telf: +34 961 345 454
valencia@rodamientos.net

ROYSE VALLADOLID

Pol. Ind. San Cristóbal
C/Plata, nº22, nave A
47012-Valladolid
Telf: +34 983 217 867
valladolid@rodamientos.net

ROYSE RODABUR

Alcalde Martín Cobos, nº15
Pentasa 1, nave 1
09007-Burgos
Telf: +34 947 474 455
burgos@rodamientos.net

ROYSE MÁLAGA

Pol. Ind. San Luis
C/Veracruz, nº 37
29006-Málaga
Telf: +34 951 491 239
malaga@rodamientos.net

ROYSE MURCIA

Pol. Ind. La Polvorista
C/José Colucho Moñino
nave C23
30500-Molina de Segura
(Murcia)
Telf: +34 968 611 050
murcia@rodamientos.net

ROYSE PORRIÑO

Pol. Ind. A Granxa
Rúa C, Paralela 4, Parcela 133
36400-O Porriño
(Pontevedra)
Telf: +34 986 342 870
galicia@rodamientos.net

ROYSE MEDINA

C/Alto de San Juan, nº1-A bajo
47800-Medina de Rioseco
(Valladolid)
Telf: +34 983 217 867
rioseco@rodamientos.net

ROYSE NORTE


P.I. Txirrita Maleo 2M
20100 - Rentería
(Guipúzcoa)
Telf: +34 943 400 886
norte@rodamientos.net

ROYSE CATALUNYA

P.E. Cervelló, C/Macabeo 10
08758- Cervelló
(Barcelona)
Telf: +34 936 630 740
bcn@rodamientos.net

ROYSE iSM

Parque Sevilla Industrial
Calle Parsi, 3, nº12
41016-Sevilla
Telf: +34 954 999 860

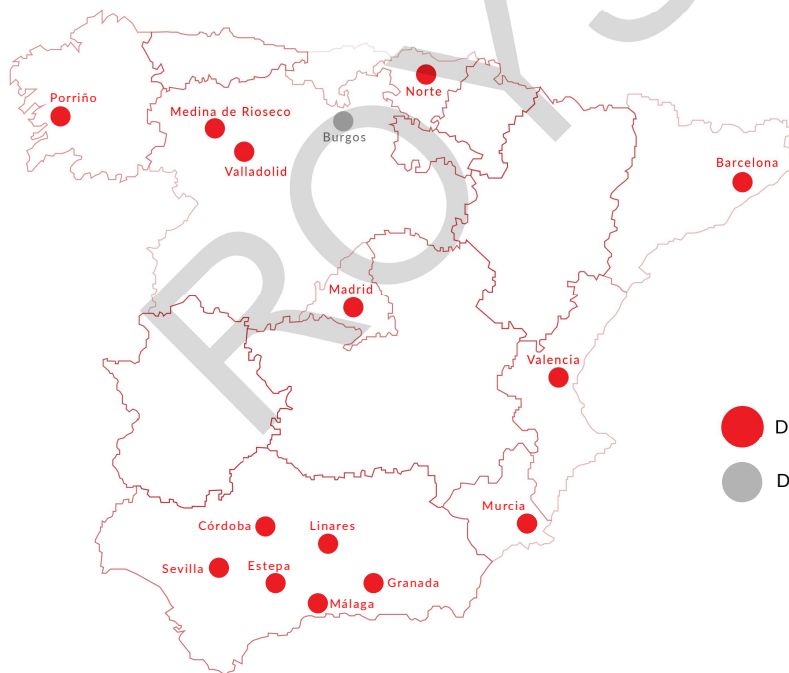

Delegaciones



Distribuidores asociados

