


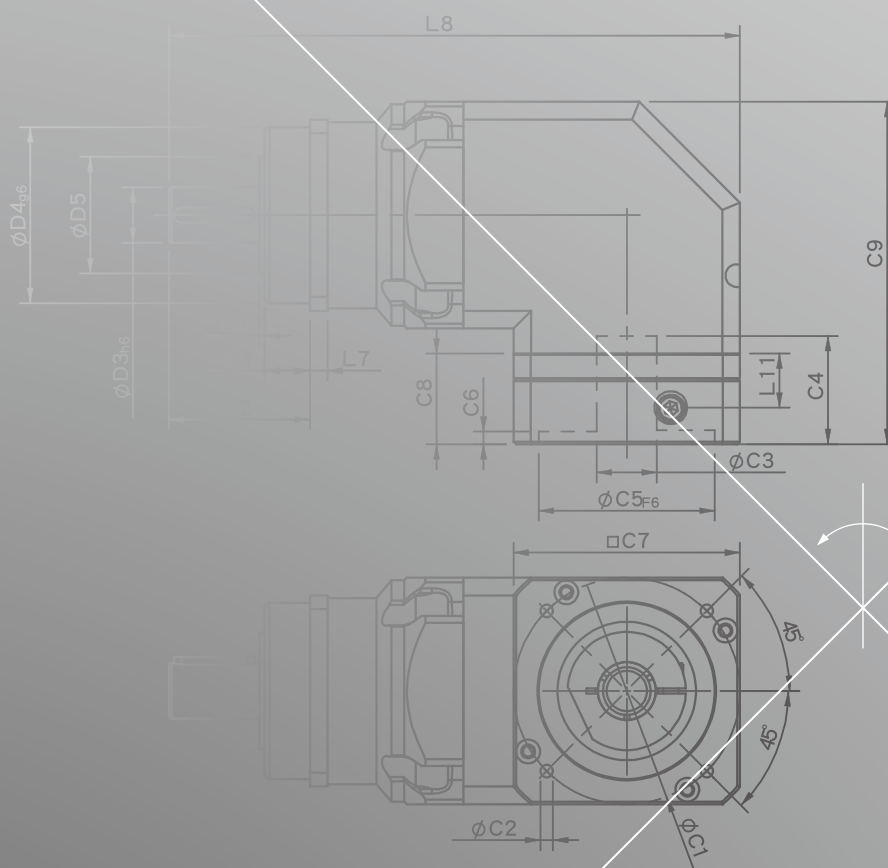

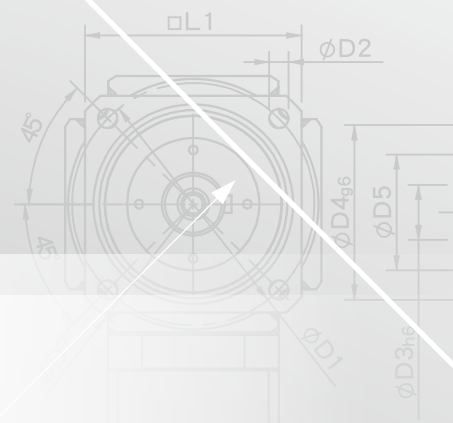


PUR SERIES

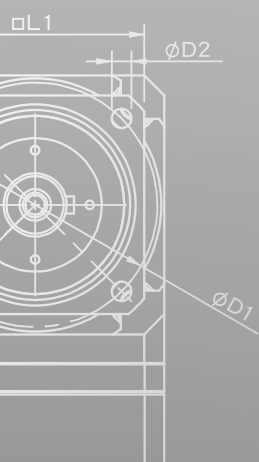

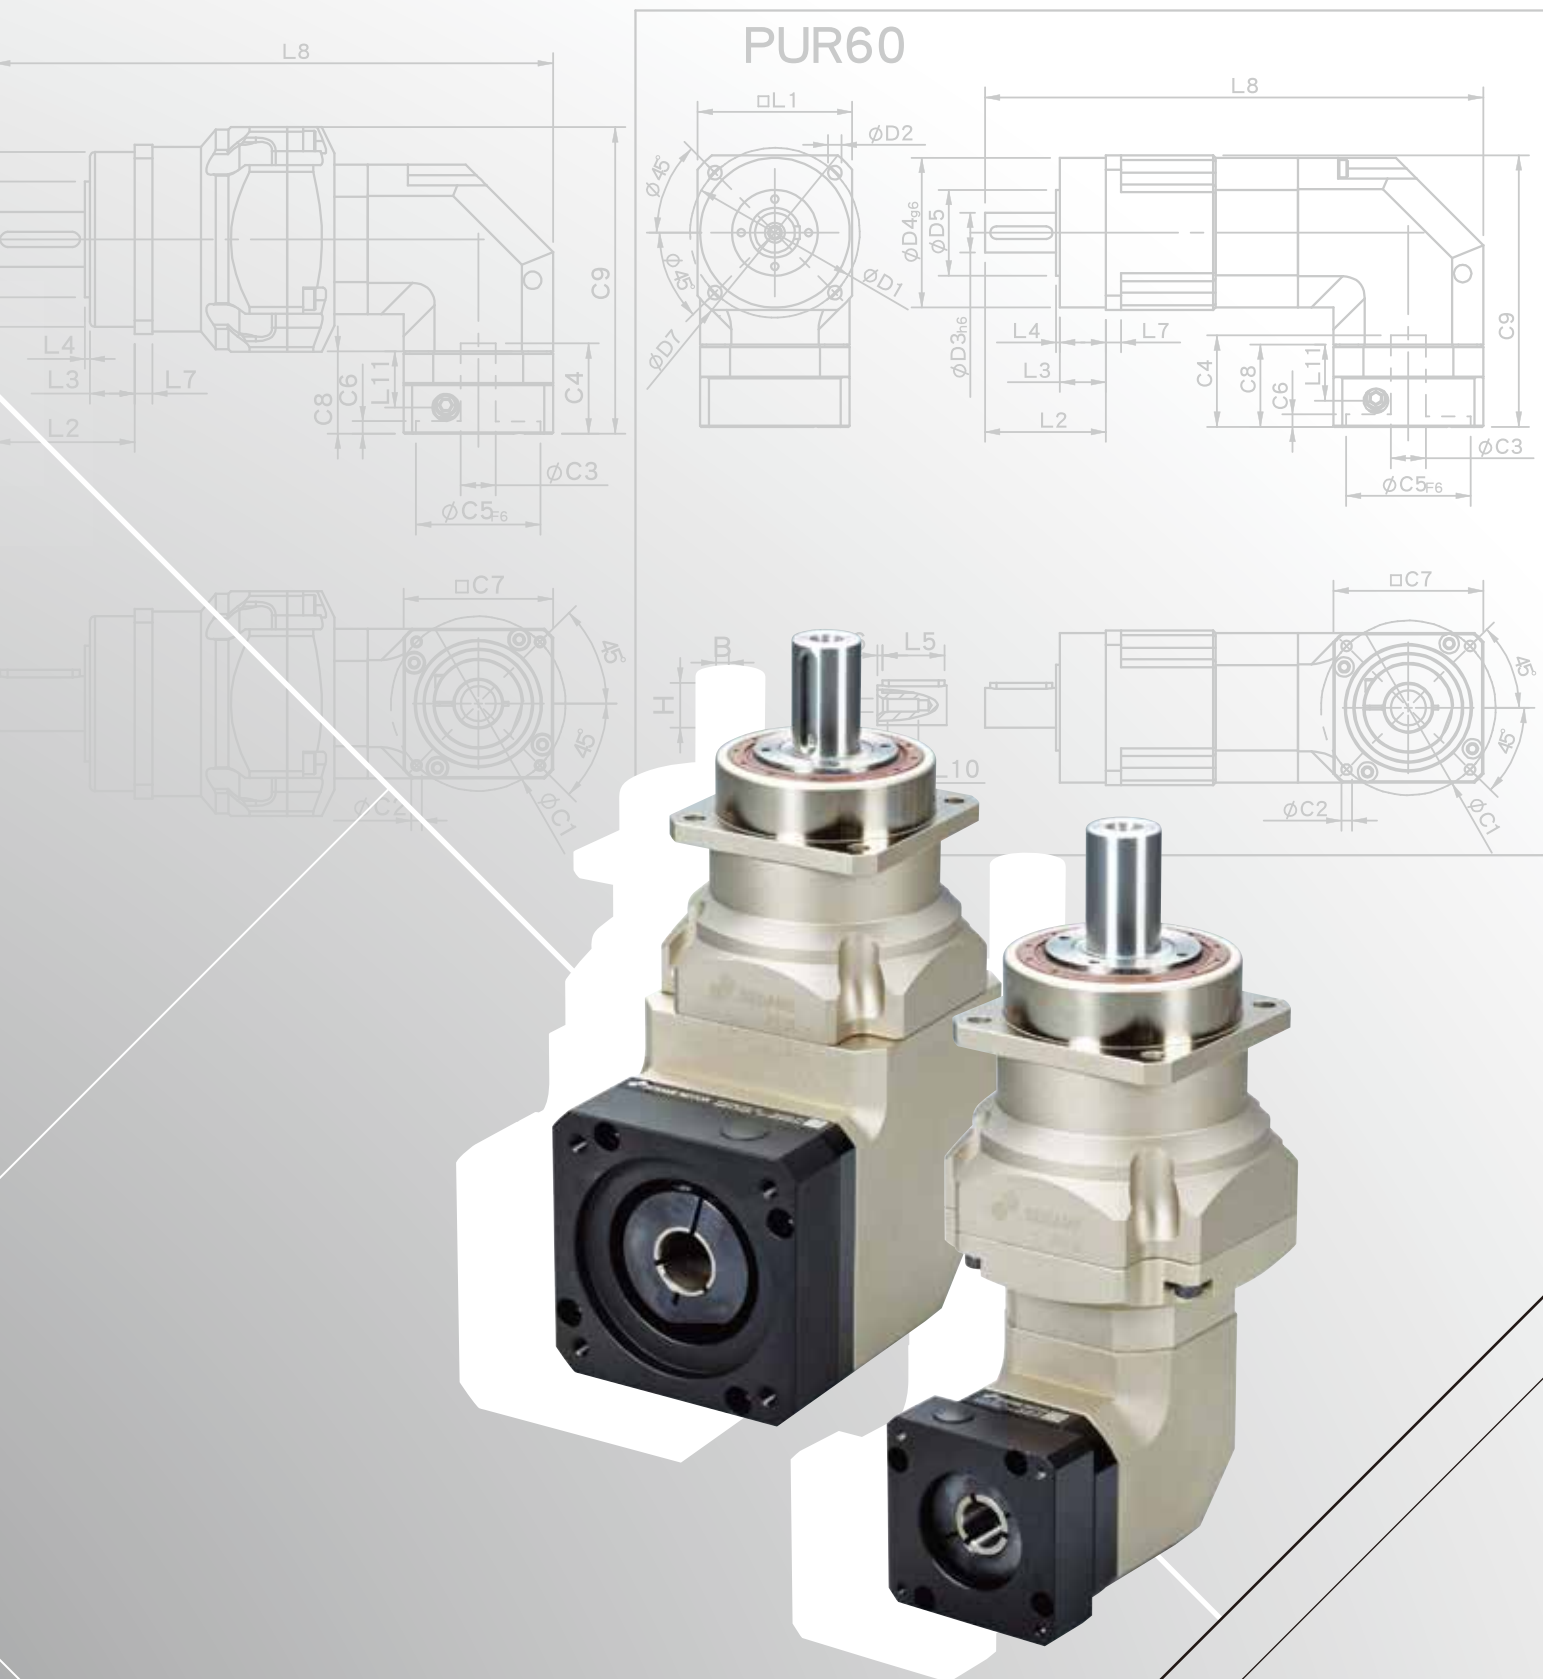

PUR Single Stage Dimensions

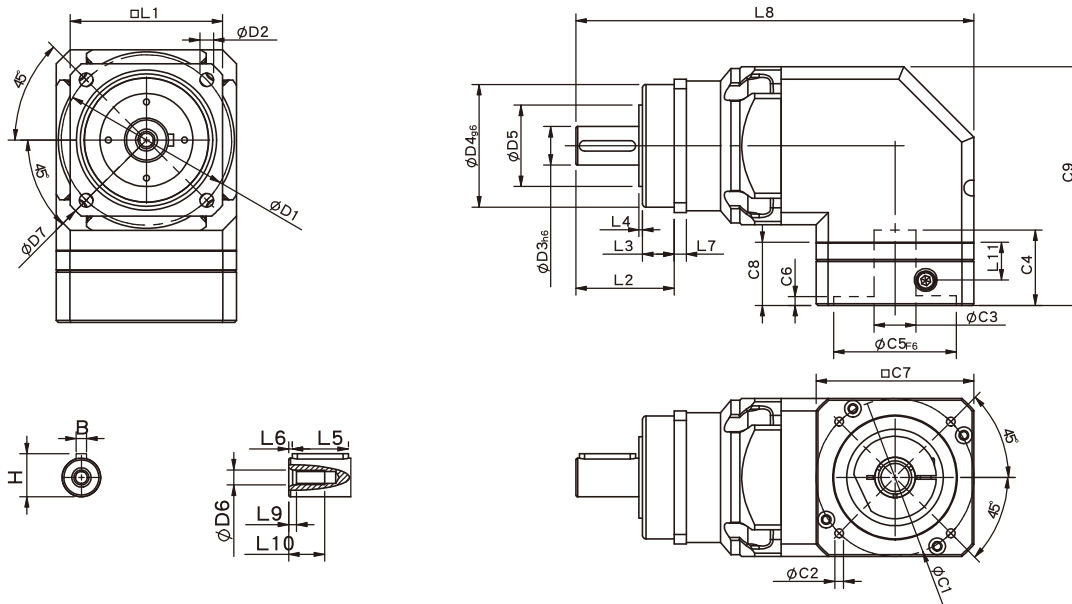

Specifications



Unit:mm

Dimensions	PUR60	PUR75	PUR100	PUR140	PUR180	PUR220
D1	68	85	120	165	215	250
D2	5.5	6.8	9	11	13	17
D3 _{h6}	16	22	32	40	55	75
D4 _{g6}	60	70	90	130	160	180
D5	34.6	46.4	59.6	79.2	94.5	114.4
D6	M5x0.8P	M8x1.25P	M12x1.75P	M16x2.0P	M20x2.5P	M20x2.5P
D7	80	100	138	186	239	292
L1	62	76	105	142	180	220
L2	48.5	56	88	112	112	138
L3	18.5	18	28	27	27	30
L4	1.5	2	2	3	3	3
L5	25	32	40	60	70	90
L6	2	2	5	5	6	7
L7	6	7	10	12	15	20
L8	166.7	227	260.5	346.2	414.7	490.2
L9	4	4.5	6	6	8	15
L10	16.5	20.5	30	38	48	42
L11	22.5	21.5	31.8	44.7	44	60
C1 ²	70	90	115	145	200	215
C2 ²	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.75P	M12x1.75P
C3 ²	≤14/≤19	≤19/≤24	≤24/≤32	≤35	≤50	≤55
C4 ²	34	45	53	76.8	78.8	98.7
C5 ² _{F6}	50	70	95	110	114.3	180
C6 ²	4	4	6	5.5	6	6
C7 ²	60	90	115	140	180	220
C8 ²	33	36	48	65	65	85
C9 ²	108.8	136	174.5	207	247.5	287.5
B	5	6	10	12	16	20
H	18	24.5	35	43	59	79.5

★ C1~C9 are motor specific dimensions(metric std shown),Size may vary according to the motor flange chosen.

★ Specification subject to change without notice.

PUR Double Stage Dimensions

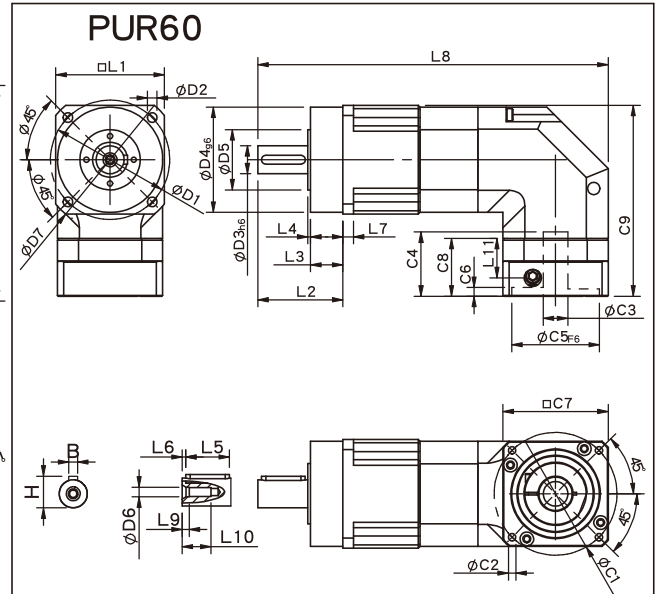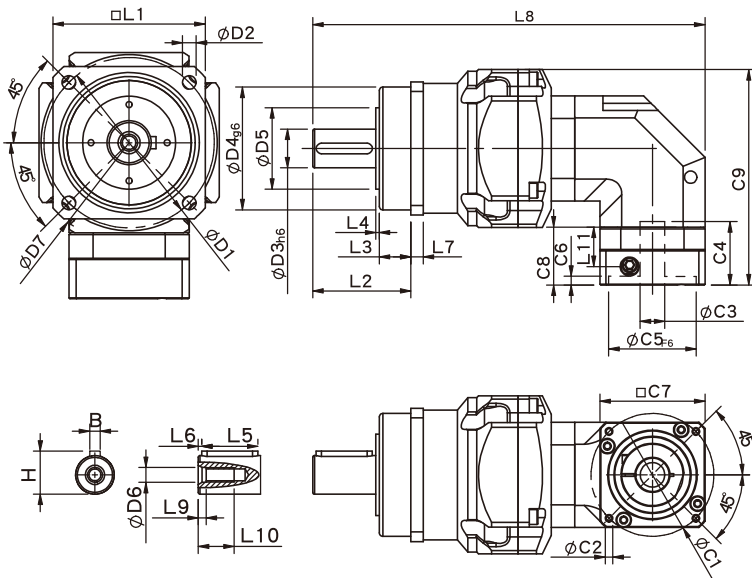

Specifications

Unit:mm

Dimensions	PUR60	PUR60T	PUR75T	PUR100T	PUR140T	PUR180T	PUR220T
D1	68	68	85	120	165	215	250
D2	5.5	5.5	6.8	9	11	13	17
D3 h6	16	16	22	32	40	55	75
D4 g6	60	60	70	90	130	160	180
D5	34.6	34.6	46.4	59.6	79.2	94.5	114.4
D6	M5x0.8P	M5x0.8P	M8x1.25P	M12x1.75P	M16x2.0P	M20x2.5P	M20x2.5P
D7	80	80	100	138	186	239	292
L1	62	62	76	105	142	180	220
L2	48.5	48.5	56	88	112	112	138
L3	18.5	18.5	18	28	27	27	30
L4	1.5	1.5	2	2	3	3	3
L5	25	25	32	40	60	70	90
L6	2	2	2	5	5	6	7
L7	6	6	7	10	12	15	20
L8	199.7	170.3	223.7	286.5	358.5	445.4	537.2
L9	4.5	4	4.5	6	6	8	15
L10	20.5	16.5	20.5	30	38	48	42
L11	22.5	15.5	22.5	21.5	31.8	44.7	44
C1 ²	70	46	70	90	115	145	200
C2 ²	M5x0.8P	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.7P
C3 ²	≤14/≤19	≤8/≤11	≤14/≤19	≤19/≤24	≤24/≤32	≤35	≤50
C4 ²	34	29	34	45	53.5	76.8	78.8
C5 ² F6	50	30	50	70	95	110	114.3
C6 ²	4	4	4	6	6	5.5	6
C7 ²	60	42.6	60	90	115	140	180
C8 ²	33	25	33	36	48	65	65
C9 ²	108.8	80.5	122.8	148.5	188	223.5	267.5
B	6	5	6	10	12	16	20
H	24.5	18	24.5	35	43	59	79.5

★ C1~C9 are motor specific dimensions(metric std shown), Size may vary according to the motor flange chosen.

★ Specification subject to change without notice.

PUR Specifications Table

Specifications		Stage	Ratio	PUR-60	PUR-75	PUR-100	PUR-140	PUR-180	PUR-220
Nominal Output Torque T_{2N}	$N \cdot m$	1	3	53	145	180	310	580	950
			4	55	150	240	450	1100	1500
			5	54	140	290	530	1200	1800
			6	46	135	280	490	1100	1620
			7	44	125	270	450	1100	1750
			8	41	110	240	390	1000	1550
			9	37	95	220	360	900	1500
			10	37	95	220	360	900	1450
			14	44	125	270	450	1100	1750
		20	37	95	220	360	900	1450	
		Stage	Ratio	PUR-60 (T)	PUR-75T	PUR-100T	PUR-140T	PUR-180T	PUR-220T
		2	15	53	145	180	530	1200	2000
			20	55	150	240	550	1200	2000
			25	54	140	290	530	1200	2000
			30	53	145	180	530	1200	2000
			35	54	140	290	530	1200	2000
			40	55	150	240	530	1200	2000
			45	54	140	290	530	1200	2000
			50	54	140	290	530	1200	2000
			60	46	135	280	490	1100	1850
			70	44	125	270	450	1100	1750
			80	41	110	240	390	1000	1550
			90	37	95	220	360	900	1500
			100	37	95	220	360	900	1450
			120	46	135	280	490	1100	1850
			140	44	125	270	450	1100	1750
			160	41	110	240	390	1000	1550
			180	37	95	220	360	900	1500
			200	37	95	220	360	900	1450
Emergency Stop Torque T_{2NOT}	$N \cdot m$		3.0 times of Nominal Output Torque (*Max. Output Torque T_{2B} = 60% of Emergency Stop Torque)						
Nominal Input Speed n_{1N}	rpm	1,2	3-200	5000	4000	4000	3000	3000	2000
Max. Input Speed n_{1max}	rpm	1,2	3-200	10000	8000	8000	6000	6000	4000
Micro Backlash P0	arcmin	1	3-20	-	≤ 3	≤ 2	≤ 2	≤ 2	≤ 2
		2	15-200	-	≤ 5	≤ 4	≤ 4	≤ 4	≤ 4
Precision Backlash P1	arcmin	1	3-20	≤ 5	≤ 5	≤ 4	≤ 4	≤ 4	≤ 4
		2	15-200	≤ 7	≤ 7	≤ 7	≤ 7	≤ 7	≤ 7
Standard Backlash P2	arcmin	1	3-20	≤ 7	≤ 7	≤ 6	≤ 6	≤ 6	≤ 6
		2	15-200	≤ 9	≤ 9	≤ 9	≤ 9	≤ 9	≤ 9
Torsional Rigidity	$N \cdot m$ / arcmin	1,2	3-200	7	14	25	50	150	220
Max. Radial Load F_{2rB}^1	N	1,2	3-200	4130	5220	10650	17600	22000	27800
Max. Axial Load F_{2aB}^1	N	1,2	3-200	2500	3300	5700	11300	14000	16200
Operating Temp.	°C		3-200	-10 °C ~ +90 °C					
Service Life	hr		3-200	30,000 (15,000/Continuous operation)					
Efficiency	%	1	3-10	≥ 95%					
		2	15-200	≥ 92%					
Weight	kg	1	3-10	3.1	5.5	12.5	25.5	46	75
		2	15-200	3.7/3.3	4.9	13.6	27	50	88
Mounting Position	-	1,2	3-200	Any direction					
Noise Level ²	dBA/1m	1,2	3-200	64	66	68	70	72	74
Protection Class	-	1,2	3-200	IP65					
Lubrication	-	1,2	3-200	Synthetic Lubricant					
Inertia(J1)									
Stage	Ratio	unit		PUR-60	PUR-75	PUR-100	PUR-140	PUR-180	PUR-220
1	3/4/5/7/9	$Kg \cdot cm^2$		0.40	2.28	6.87	24.2	69.8	138.2
	6/8/10/14/20			0.30	1.45	4.76	14.5	50.3	103.6
Stage	Ratio			PUR-60(T)	PUR-75T	PUR-100T	PUR-140T	PUR-180T	PUR-220T
2	15/20/25/35/45			0.40(0.08)	0.72	3.02	7.83	27.7	80.3
	others			0.30(0.06)	0.38	1.64	5.00	15.9	55.3
* 1. Applied to the output shaft center @100rpm. * 2. Measured at 3000 rpm with no load. These values are measured by gearbox with ratio = 10 (1-stage) or ratio = 100 (2-stage) at nominal input speed or 3000 rpm (if nominal input speed is higher than 3000 rpm) with no load. ※ The above figures/specifications are subject to change without prior notice.									

* 1. Applied to the output shaft center @100rpm.

* 2. Measured at 3000 rpm with no load. These values are measured by gearbox with ratio = 10 (1-stage) or ratio = 100 (2-stage) at nominal input speed or 3000 rpm (if nominal input speed is higher than 3000 rpm) with no load.

※ The above figures/specifications are subject to change without prior notice.

Products due to human error, natural disasters or other factors lead to poor or damaged, will not be covered under warranty.

SERVO MOTOR GEARHEADS



PHL
PHFR
PHF
PGH
PUR
PUL
PGLH
PGL
PGC
PGE
PGRH
PGR
PGFR
PGF
PBC
PBE
PAE
PAC
PAN
PGS
PNS