

MEGARIB
PU endless ribbed belts



MEGARIB

PU endless ribbed belts




MEGARIB belts are manufactured in polyurethane with polyester high tension cords, which combine the high flexibility of flat belts with the power transmission capability of v-belts.

These belts have the following features

- Dimensional stability
- High flexibility
- Small pulley diameters
- High speeds
- Excellent oil, water and ozone resistance




The main applications are

- Food processors
- Grass cutting equipment
- Electrical household appliances
- Washing machines
- Electrical tools
- Woodworking equipment
- Domestic power tools

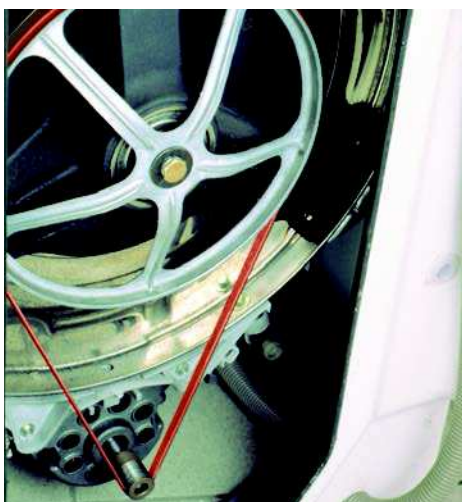

On request, special elastic Megarib belts can be manufactured in polyurethane with a semi-elastic tension member. They can be fitted on fix centre drives, reducing noise and vibrations. The absence of a tensioning mechanism, offers additional cost savings.

Standard Megarib belts are available in a wide variety of rib pitches and length (see below).

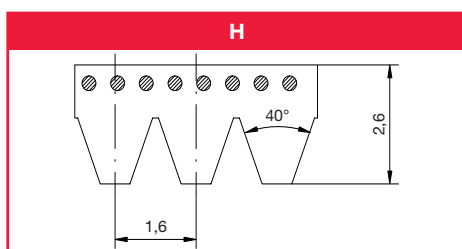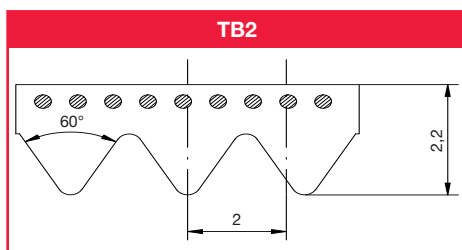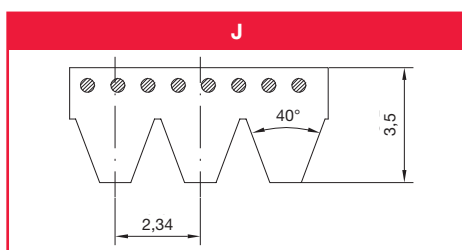

| J | |
|-------------------------|----------|
| Standard length (mm) | (inches) |
| 220 | 8,7 |
| 271 | 10,7 |
| 275 | 10,8 |
| 278 | 10,9 |
| 283 | 11,1 |
| 288 | 11,3 |
| 304 | 12,0 |
| 317,5 | 12,5 |
| 330 | 13,0 |
| 345 | 13,6 |
| 356 | 14,0 |
| 381 | 15,0 |
| 392 | 15,4 |
| 406 | 16,0 |
| 431 | 17,0 |
| 444 | 17,5 |
| 457 | 18,0 |
| 483 | 19,0 |
| 508 | 20,0 |
| 558 | 22,0 |
| 584 | 23,0 |
| 610 | 24,0 |
| 630 | 24,8 |
| 660 | 26,0 |
| 681 | 26,8 |
| 711 | 28,0 |
| 762 | 30,0 |
| 864 | 34,0 |
| 914 | 36,0 |
| 953 | 37,5 |
| 1010 | 39,8 |
| 1086 | 42,8 |
| 1130 | 44,5 |
| 1163 | 45,8 |
| 1239 | 48,8 |
| 1268 | 49,9 |
| 1397 | 55,0 |

| TB2 | |
|-------------------------|----------|
| Standard length (mm) | (inches) |
| 156 | 6,1 |
| 170 | 6,7 |
| 200 | 7,9 |
| 220 | 8,7 |
| 231 | 9,1 |
| 237 | 9,3 |
| 248 | 9,8 |
| 266 | 10,5 |
| 295 | 11,6 |
| 310 | 12,2 |
| 327 | 12,9 |
| 330 | 13,0 |
| 345 | 13,6 |
| 360 | 14,2 |
| 380 | 15,0 |
| 390 | 15,4 |
| 400 | 15,7 |
| 430 | 16,9 |
| 480 | 18,9 |
| 510 | 20,1 |
| 526 | 20,7 |
| 535 | 21,1 |
| 575 | 22,6 |
| 598 | 26,5 |
| 630 | 24,8 |
| 660 | 26,0 |
| 675 | 26,6 |
| 725 | 28,5 |
| 770 | 30,3 |
| 1186 | 46,7 |

| H | |
|-------------------------|----------|
| Standard length (mm) | (inches) |
| 223 | 8,8 |
| 254 | 10,0 |
| 261 | 10,3 |
| 269 | 10,6 |
| 295 | 11,6 |
| 330 | 13,0 |
| 340 | 13,4 |
| 345 | 13,6 |
| 375 | 14,8 |
| 389 | 15,3 |
| 400 | 15,7 |
| 410 | 16,1 |
| 588 | 23,1 |
| 609 | 24,0 |
| 650 | 25,6 |
| 768 | 30,2 |
| 935 | 36,8 |
| 1000 | 39,4 |
| 1086 | 42,8 |
| 1120 | 44,1 |
| 1163 | 45,8 |
| 1203 | 47,4 |
| 1240 | 48,8 |
| 1775 | 69,9 |
| 1976 | 77,8 |